

Butt Splices - SEAMLESS



PART#	WIRE	RANGE	DESCRIPTION	\$/25	\$/50	\$/100	\$/500
PSRBS	22-18	RED	Butt Splice	\$7.86	\$14.96	\$28.50	\$128.25
PSBBS	16-14	BLUE	Butt Splice	9.21	17.54	33.40	150.30
PSYBS	12-10	YELLOW	Butt Splice	12.65	24.10	45.90	206.55
PSRBS8	8	RED	Butt Splice (NYLON INS)	25.86	49.27	93.84	422.28

Female Quick Disconnects



PART#	WIRE	RANGE	DESCRIPTION	\$/10	\$/25	\$/50	\$/100
PSRF250	22-18	RED	.250 Female	\$4.44	\$10.09	\$18.35	\$33.37
PSBF250	16-14	BLUE	.250 Female	4.63	10.52	19.13	34.78
PSYF250	12-10	YELLOW	.250 Female	4.96	11.28	20.51	37.29

Insulated Female Quick Disconnects



PART#	WIRE	RANGE	DESCRIPTION	\$/10	\$/25	\$/50	\$/100
PSRFI	22-18	RED	.250 Female	\$5.70	\$12.95	\$23.55	\$42.82
PSBFI	16-14	BLUE	.250 Female	5.87	13.35	24.27	44.13
PSYFI	12-10	YELLOW	.250 Female	6.96	16.56	31.55	56.79


Insulated Male Quick Disconnects



PART#	WIRE	RANGE	DESCRIPTION	\$/10	\$/25	\$/50	\$/100
PSRMI	22-18	RED	.250 Male	\$5.68	\$12.92	\$23.49	\$42.71
PSBMI	16-14	BLUE	.250 Male	5.85	13.30	24.17	43.95
PSYMI	12-10	YELLOW	.250 Male	7.02	16.73	31.86	60.68

SOLDER / SEAL SPLICES

- **AMERICAN MADE**
- **PROVIDES STRAIN RELIEF**
- **PERMANENT SOLDERED AND SEALED CONNECTION**

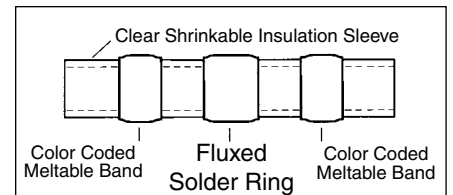

Splice Illustration

The Adhesive Lined Shrink Sleeve Has A Solder Ring Inside. When Heated, a Permanently Soldered Connection is Created That is Sealed From Moisture.



PART#	WIRE	RANGE	DESCRIPTION	\$/10	\$/25	\$/50	\$/100
SSRBS	22-18	RED	Solder Splice	\$6.82	\$15.51	\$28.20	\$51.26
SSBBS	16-14	BLUE	Solder Splice	7.07	16.06	29.20	53.08
SSYBS	12-10	YELLOW	Solder Splice	9.26	21.04	38.25	69.55

FLAMELESS HEAT GUN

- **WATERPROOF & WINDPROOF**
- **SELF STARTING with SAFETY LOCK**
- **WORKS WITH BUTANE LIGHTER FUEL**



Part#	Dealer
HG1	\$32.91